Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

TFT LCD Approval Specification

MODEL NO.: V260B1 – L11(ECO only)

Customer: _____

Approved by: _____

Note:

Approved By	TV Head Division
	LY Chen

Reviewed By	QA Dept.	Product Development Div.
	Tomy Chen	WT Lin

Prepared By	LCD TV Marketing and Product Management Div.	
	WY Li	Delia Lin

1

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

- CONTENTS -

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

REVISION HISTORY

Version	Date	Page (New)	Section	Description
Ver 6.0	18, Aug '08	All	All	Approval Specification was first issued.

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

1. GENERAL DESCRIPTION

1.1 OVERVIEW

V260B1- L11 is a TFT Liquid Crystal Display module with 5U-CCFL Backlight unit and 1ch-LVDS interface. The display diagonal is 26". This module supports 1366 x 768 WXGA format and can display 16.2M colors (6-bit+FRC colors). The inverter module for backlight is built-in.

1.2 FEATURES

- Brightness 450nits

- Contrast Ratio (800:1)

- Fast Response Time (8ms)

- Color Saturation NTSC 72%

- WXGA (1366 x 768 pixels) Resolution

- DE (Data Enable) Only Mode

- LVDS (Low Voltage Differential Signaling) Interface

- Viewing Angle: 160(H)/150(V) (CR>10) TN Technology

-Color Reproduction (Nature Color)

1.3 APPLICATION

- TFT LCD TVs

- High Brightness, Multi-Media Displays

1.4 GENERAL SPECIFICATI0NS

Item	Specification	Unit	Note
Active Area	575.769 (H) x 323.712 (V)　　(26" Diagonal)	mm	(1)
Bezel Opening Area	580.8 (H) x 328.8 (V)	mm	
Driver Element	a-si TFT Active Matrix	—	
Pixel Number	1366 x R.G.B. x 768	pixel	
Pixel Pitch (Sub Pixel)	0.1405 (H) x 0.4215 (V)	mm	
Pixel Arrangement	RGB Vertical Stripe	—	
Display Colors	16.2M	color	
Display Operation Mode	Transmissive Mode / Normally White	—	
Surface Treatment	Anti-Glare Coating (Haze 25%) Hard Coating (3H)	—	

1.5 MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal(H)	625	626	627	mm	
	Vertical(V)	372	373	374	mm	
	Depth(D)	31	32	33	mm	To Rear
	Depth(D)	45.7	46.7	47.7	mm	To Inverter Cover
Weight		3950	4200	4450	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Version 6.0

Approval

2. ABSOLUTE MAXIMUM RATINGS

2.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T_{ST}	-20	+60	ºC	(1)
Operating Ambient Temperature	T_{OP}	0	+50	ºC	(1), (2)
Shock (Non-Operating)	S_{NOP}	—	50	G	(3), (5)
Vibration (Non-Operating)	V_{NOP}	—	1.0	G	(4), (5)

Note (1) Temperature and relative humidity range is shown in the figure below.

      (a) 90 %RH Max. (Ta $\leqq$ 40 ºC).

      (b) Wet-bulb temperature should be 39 ºC Max. (Ta > 40 ºC).

      (c) No condensation.

Note (2) The maximum operating temperature is based on the test condition that the surface temperature of

      display area is less than or equal to 65 ºC with LCD module alone in a temperature controlled chamber.

      Thermal management should be considered in final product design to prevent the surface temperature of

      display area from being over 65 ºC. The range of operating temperature may degrade in case of improper

      thermal management in final product design.

Note (3) 11 ms, half sine wave, 1 time for ± X, ± Y, ± Z.

Note (4) 10 ~ 500 Hz, 10 min, 1 time each X, Y, Z.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough

      so that the module would not be twisted or bent by the fixture.

Relative Humidity (%RH)

Operating Range

Storage Range

Temperature (ºC)

5

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval
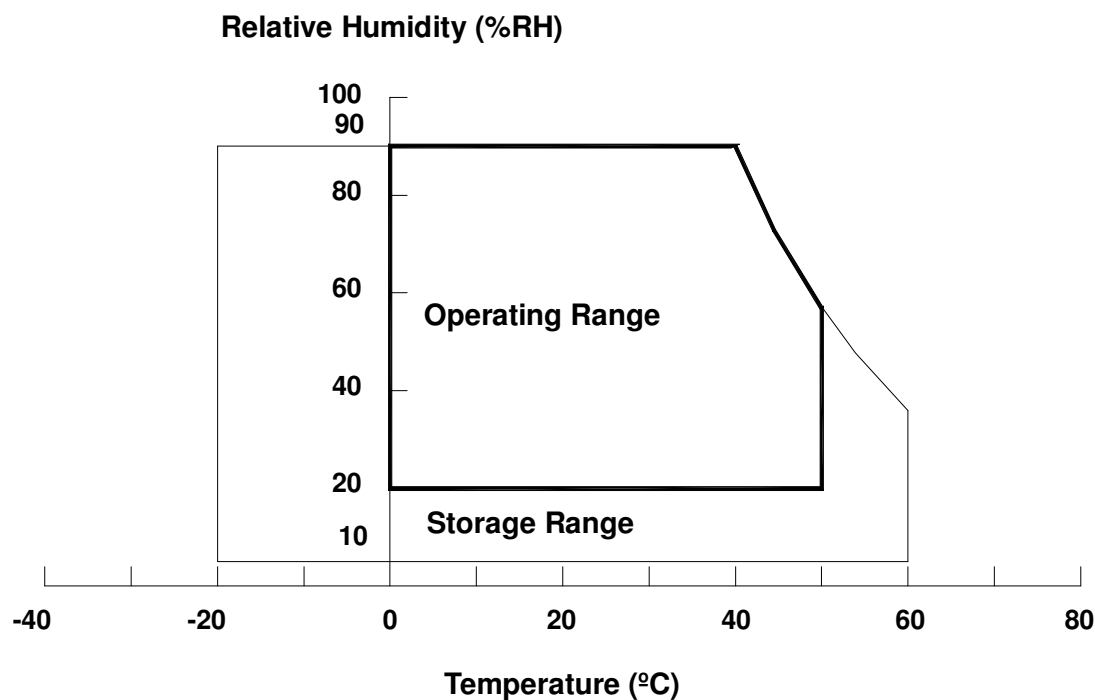
2.2 ELECTRICAL ABSOLUTE RATINGS

2.2.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	Vcc	-0.3	13.0	V	(1)
Input Signal Voltage	V_{IN}	-0.3	3.6	V	

2.2.2 BACKLIGHT UNIT

Item	Symbol	Test Condition	Min.	Type	Max.	Unit	Note
Lamp Voltage	V_W	Ta = 25 ℃	—	—	3000	V_{RMS}	
Power Supply Voltage	V_{BL}	—	0	—	30	V	(1)
Control Signal Level	—	—	-0.3	—	7	V	(1), (3)

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Functional operation should be restricted to the conditions described under normal operating conditions.

Note (2) No moisture condensation or freezing.

Note (3) The control signals includes Backlight On/Off Control, Internal PWM Control and External PWM Control.
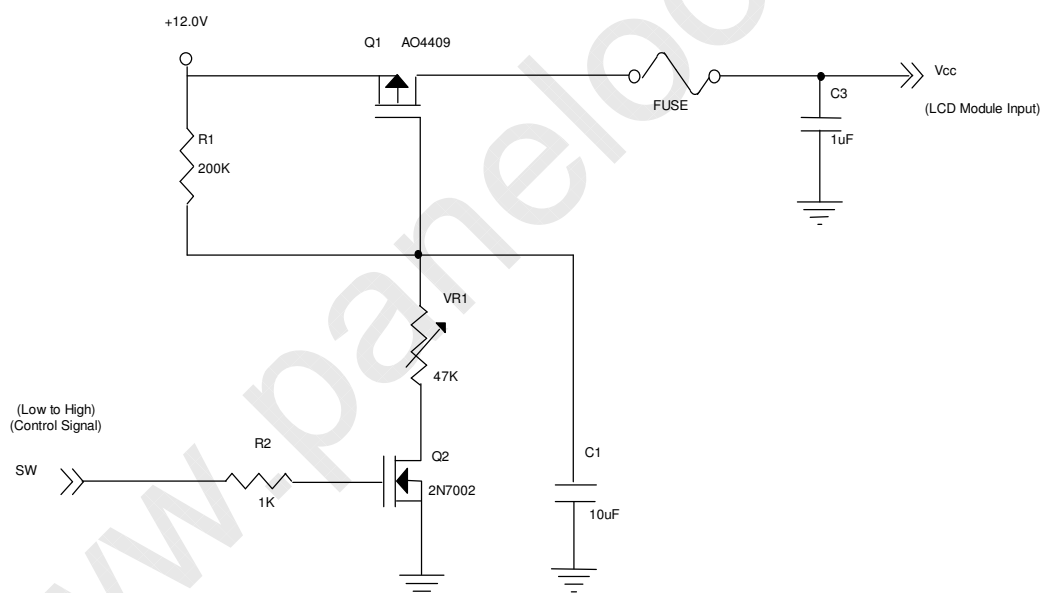
Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta = 25 ± 2 ºC

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		V_{CC}	11.4	12.0	12.6	V	(1)
Power Supply Ripple Voltage		V_{RP}	—	—	300	mV	
Rush Current		I_{RUSH}	—	—	3.0	A	(2)
Power Supply Current	White	I_{CC}	—	0.2	0.25	A	(3)
	Black		—	0.5	0.55	A	
	Vertical Stripe		—	0.4	0.45	A	
LVDS Interface	Differential Input High Threshold Voltage	V_{LVTH}	+100	—	—	mV	
	Differential Input Low Threshold Voltage	V_{LVTL}	—	—	-100	mV	
	Common Input Voltage	V_{LVC}	1.125	1.25	1.375	V	
	Terminating Resistor	R_T	—	100	—	ohm	
CMOS interface	Input High Threshold Voltage	V_{IH}	2.7	—	3.3	V	
	Input Low Threshold Voltage	V_{IL}	0	—	0.7	V	

Note (1) The module should be always operated within above ranges.

Note (2) Measurement Conditions:

Vcc rising time is 470us

7

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval
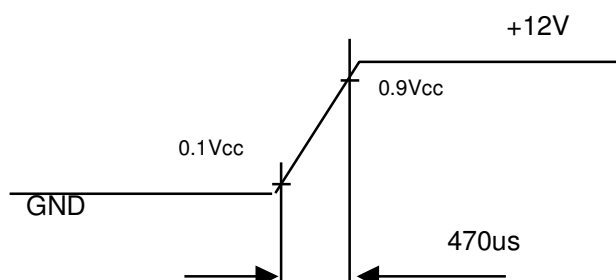
Note (3) The specified power supply current is under the conditions at Vcc = 12 V, Ta = 25 ± 2 ºC, f_v = 60 Hz, whereas a power dissipation check pattern below is displayed.

a. White Pattern

Active Area

b. Black Pattern

Active Area

c. Vertical Stripe Pattern
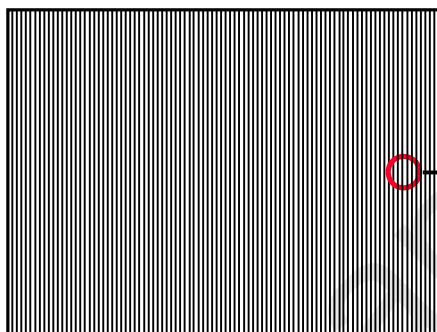
Active Area
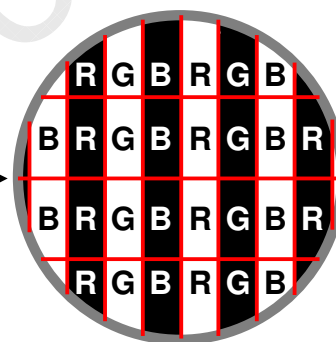
3.2 BACKLIGHT INVERTER UNIT

3.2.1 CCFL (Cold Cathode Fluorescent Lamp) CHARACTERISTICS (Ta = 25 ± 2 ºC)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Lamp Voltage	V_W	—	1760	—	V_{RMS}	I_L = 6.5mA
Lamp Current	I_L	6.0	6.5	7.0	mA_{RMS}	(1)
Lamp Starting Voltage	V_S	—	—	2830	V_{RMS}	(2), Ta = 0 ºC
		—	—	2410	V_{RMS}	(2), Ta = 25 ºC
Operating Frequency	F_O	40	—	80	KHz	(3)
Lamp Life Time	L_{BL}	50,000	60,000	—	Hrs	(4)

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

3.2.2 INVERTER CHARACTERISTICS (Ta = 25 ± 2 ºC)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power Consumption	P_{BL}	—	60	63	W	(5)(6), I_L = 6.5mA
Input Voltage	V_{BL}	22.8	24	25.2	V_{DC}	
Input Current	I_{BL}	—	2.5	—	A	Non Dimming
Input Inrush Current	—	—	—	3.9	A_{peak}	V_{BL} =24.0V
Input Ripple Noise	— -	—	—	912	mV_{P-P}	V_{BL} =22.8V
Oscillating Frequency	F_W	63	66	69	kHz	
Dimming Frequency	F_B	150	160	170	Hz	
Minimum Duty Ratio	D_{MIN}	10	20	—	%	

Note (1) Lamp current is measured by utilizing high frequency current meters as shown below:
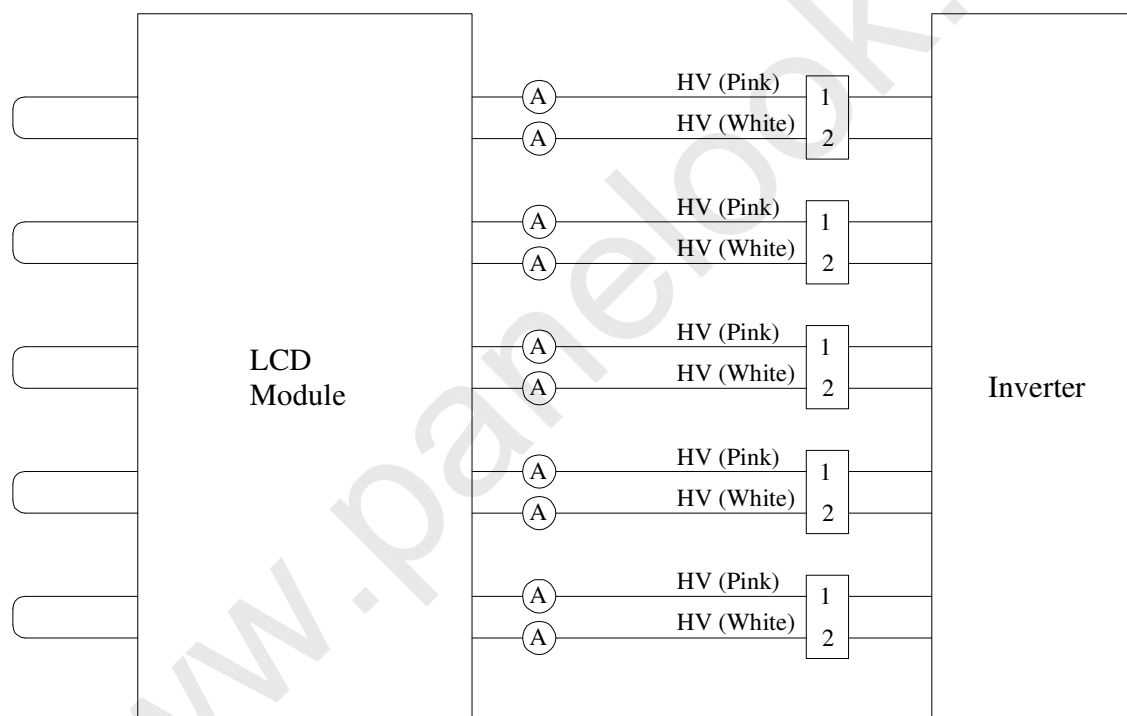
Note (2) The lamp starting voltage V_S should be applied to the lamp for more than 1 second under starting up duration. Otherwise the lamp could not be lighted on completed.

Note (3) The lamp frequency may produce interference with horizontal synchronous frequency from the display, and this may cause line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible.

9

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

Note (4) The life time of a lamp is defined as when the brightness is larger than 50% of its original value and the effective discharge length is longer than 80% of its original length (Effective discharge length is defined as an area that has equal to or more than 70% brightness compared to the brightness at the center point.) as the time in which it continues to operate under the condition Ta = 25 $\pm 2^{\circ}C$ and I_L = 6.0~ 7.0mA$_{RMS}$.

Note (5) The power supply capacity should be higher than the total inverter power consumption P_{BL}. Since the pulse width modulation (PWM) mode was applied for backlight dimming, the driving current changed as PWM duty on and off. The transient response of power supply should be considered for the changing loading when inverter dimming.

Note (6) The measurement of Max. value is based on 26" backlight unit under 24V input voltage and 6.8mA lamp in average after lighting for 30 minutes.

Note (7) The 10% minimum duty ratio is only for electric function is operated normally.

3.2.3 INVERTER INTERTFACE CHARACTERISTICS

Item		Symbol	Test Condition	Min.	Typ.	Max.	Unit	Note
Error Signal		ERR	—	—	—	—	—	(Note 2)
On/Off Control Voltage	ON	V_{BLON}		—	2.0	—	5.0	V	
	OFF			—	0	—	0.8	V	
Internal PWM Control Voltage	MAX	V_{IPWM}	—	3.0	3.15	3.3	V	Maximum Duty Ratio
	MIN			—	0	—	V	Minimum Duty Ratio
External PWM Control Voltage	HI	V_{EPWM}	—	2.0	—	5.0	V	Duty On
	LO			0	—	0.8	V	Duty Off
VBL Rising Time		Tr1	—	30	—	50	ms	
VBL Falling Time		Tf1	—	30	—	50	ms	
Control Signal Rising Time		T_r	—	—	—	100	ms	
Control Signal Falling Time		T_f	—	—	—	100	ms	
PWM Signal Rising Time		T_{PWMR}	—	—	—	50	us	
PWM Signal Falling Time		T_{PWMF}	—	—	—	50	us	
Input Impedance		R_{IN}	—	1	—	—	MΩ	
PWM Delay Time		T_{PWM}		100		300	ms	
BLON Delay Time		T_{on}	—	300	—	500	ms	
BLON Off Time		T_{off}	—	300	—	500	ms	

Note (1) The power sequence and control signal timing as shown in following figure.

Note (2) When inverter protective function is triggered, ERR will output open collector status. In normal operation, the signal of ERR will output a low level voltage.

10

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval
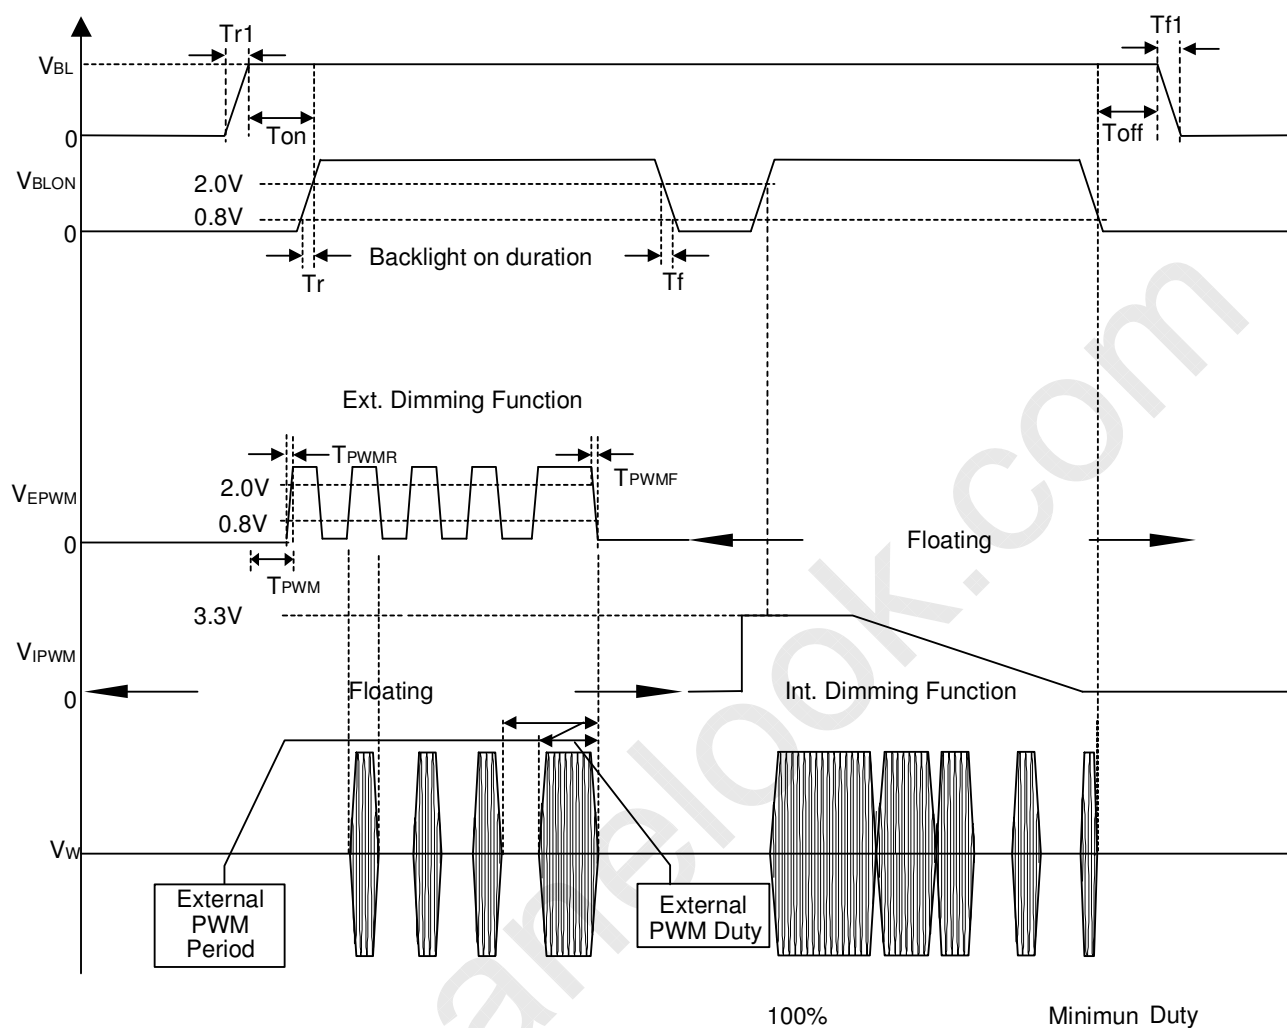
4. BLOCK DIAGRAM

4.1 TFT LCD MODULE

RX0(+/-)
RX1(+/-)
RX2(+/-)
RX3(+/-)
RXCLK(+/-)
Vcc
GND

INPUT CONNECTOR
(P-TWO,196185-30041)

TIMING CONTROLLER

DC/DC CONVERTER & REFERENCE VOLTAGE

SCAN DRIVER IC

TFT LCD PANEL (1366x3x768)

DATA DRIVER IC

CN1
VBL
GND
ERR
BLON
I_PWM
E_PWM

INVERTER CONNECTOR
CN1 :
1. **S14B-PH-SM4-TB (JST)**
2. **CI0114M1HR0-LF (Cvilux)**
   or equivalent

CN2-CN6 :
CP042CP1MR0-LF (Cvilux)
or equivalent

BACKLIGHT UNIT

12

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

5. INTERFACE PIN CONNECTION

5.1 TFT LCD MODULE

CNF1 Connector Pin Assignment

Pin No.	Symbol	Description	Note
1	VCC	Power supply: +12V	
2	VCC	Power supply: +12V	
3	VCC	Power supply: +12V	
4	VCC	Power supply: +12V	
5	GND	Ground	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	SELLVDS	Select LVDS data format	(2)
10	NC	No connection	(3)
11	GND	Ground	
12	RX0-	Negative transmission data of pixel 0	
13	RX0+	Positive transmission data of pixel 0	
14	GND	Ground	
15	RX1-	Negative transmission data of pixel 1	
16	RX1+	Positive transmission data of pixel 1	
17	GND	Ground	
18	RX2-	Negative transmission data of pixel 2	
19	RX2+	Positive transmission data of pixel 2	
20	GND	Ground	
21	RXCLK-	Negative of clock	
22	RXCLK+	Positive of clock	
23	GND	Ground	
24	RX3-	Negative transmission data of pixel 3	
25	RX3+	Positive transmission data of pixel 3	
26	GND	Ground	
27	NC	No connection	(3)
28	NC	No connection	(3)
29	GND	Ground	
30	GND	Ground	

Note (1) Connector Part No.: P-TWO,196185-30041 or compatible

Note (2) Ground or OPEN: Normal, High: JEIDA LVDS format

　　　　Please refer to 5.5 LVDS INTERFACE (Page 17)

Note (3) Reserved for internal use. Please leave it open.

13

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

5.2 BACKLIGHT UNIT

The pin configuration for the housing and leader wire is shown in the table below.

CN2-CN6 (Housing) : CP0404S000(CviLux) or equivalent.

Pin No.	Symbol	Description	Wire Color
1	HV	High Voltage	Pink
2	HV	High Voltage	White

Note (1) The backlight interface housing for high voltage side is a model CP0404S000 (CviLux) or equivalent.

The mating header on inverter part number is CP042CP1MR0-LF (CyiLux) or equivalent.

14

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval
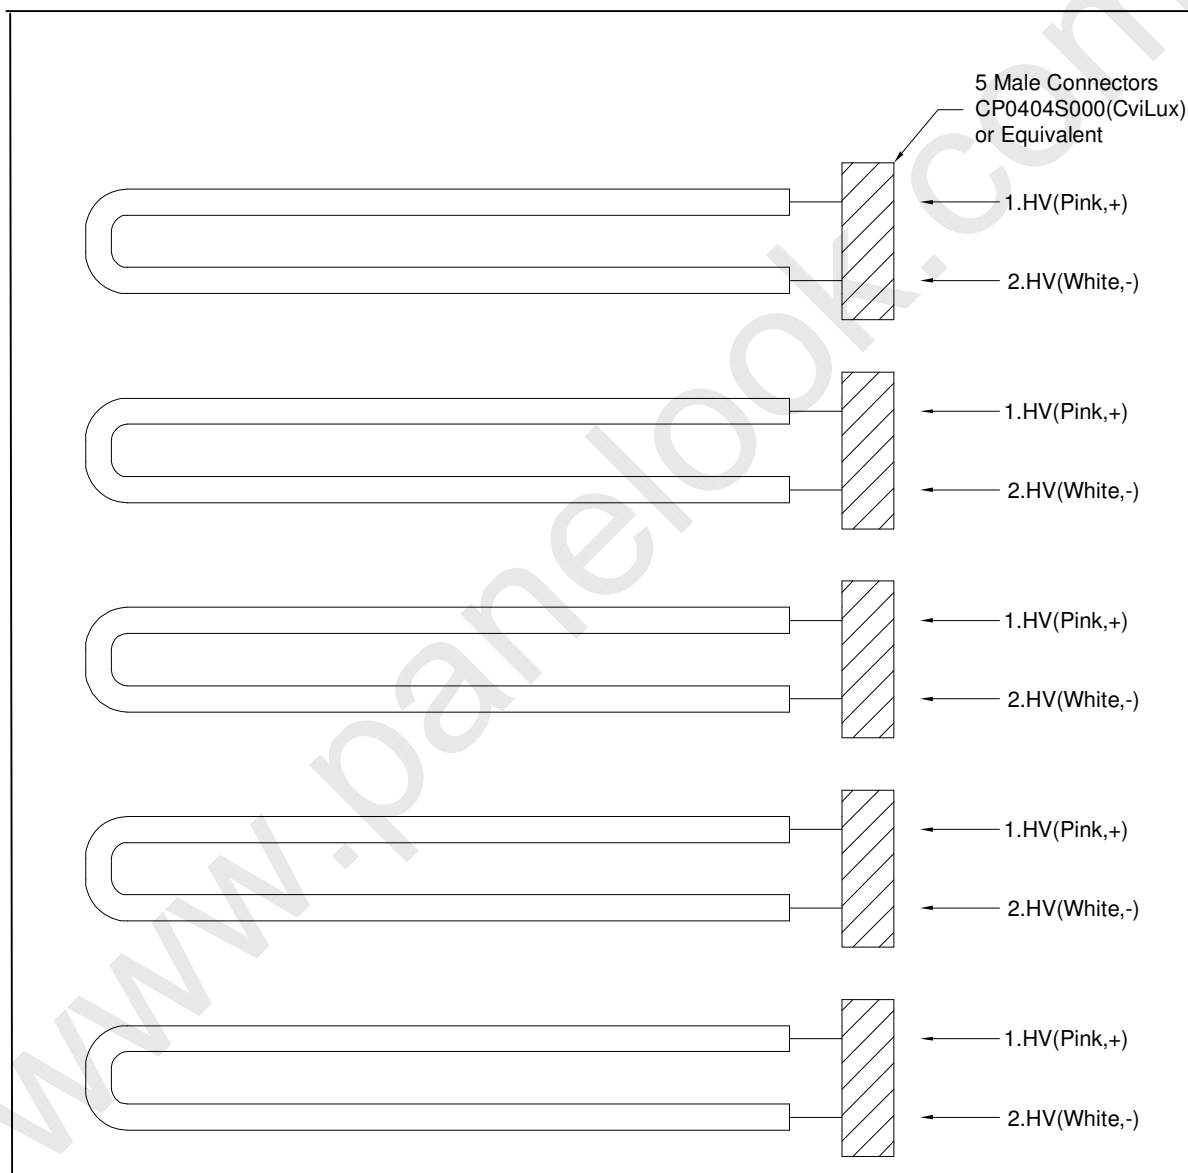
5.3 INVERTER UNIT

CN1 (Header) : 1.S14B-PH-SM4-TB(D)(LF) (JST)   2. CI0114M1HR0-LF (Cvilux) or equivalent.

Pin No.	Symbol	Description
1	VBL	+24V Power input
2		
3		
4		
5		
6	GND	Ground
7		
8		
9		
10		
11	ERR	Normal (GND) Abnormal(Open collector)
12	BLON	BL ON/OFF
13	I_PWM	Internal PWM Control
14	E_PWM	External PWM Control

Notice:

#PIN 13:Analog Dimming Control (Use Pin 13) : 0V~3.3V and Pin 14 must open.

#PIN 14:PWM Dimming Control (Use Pin 14) : Pin 13 must open.

#Pin 13 (I_PWM) and Pin 14 (E_PWM) can not open in same period.

CN2-CN6 (Header) : CP042CP1MR0-LF (Cvilux) or equivalent.

Pin	Name	Description
1	CCFL HOT	CCFL High Voltage
2	CCFL HOT	CCFL High Voltage

15

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

5.4 BLOCK DIAGRAM OF INTERFACE

CNF1
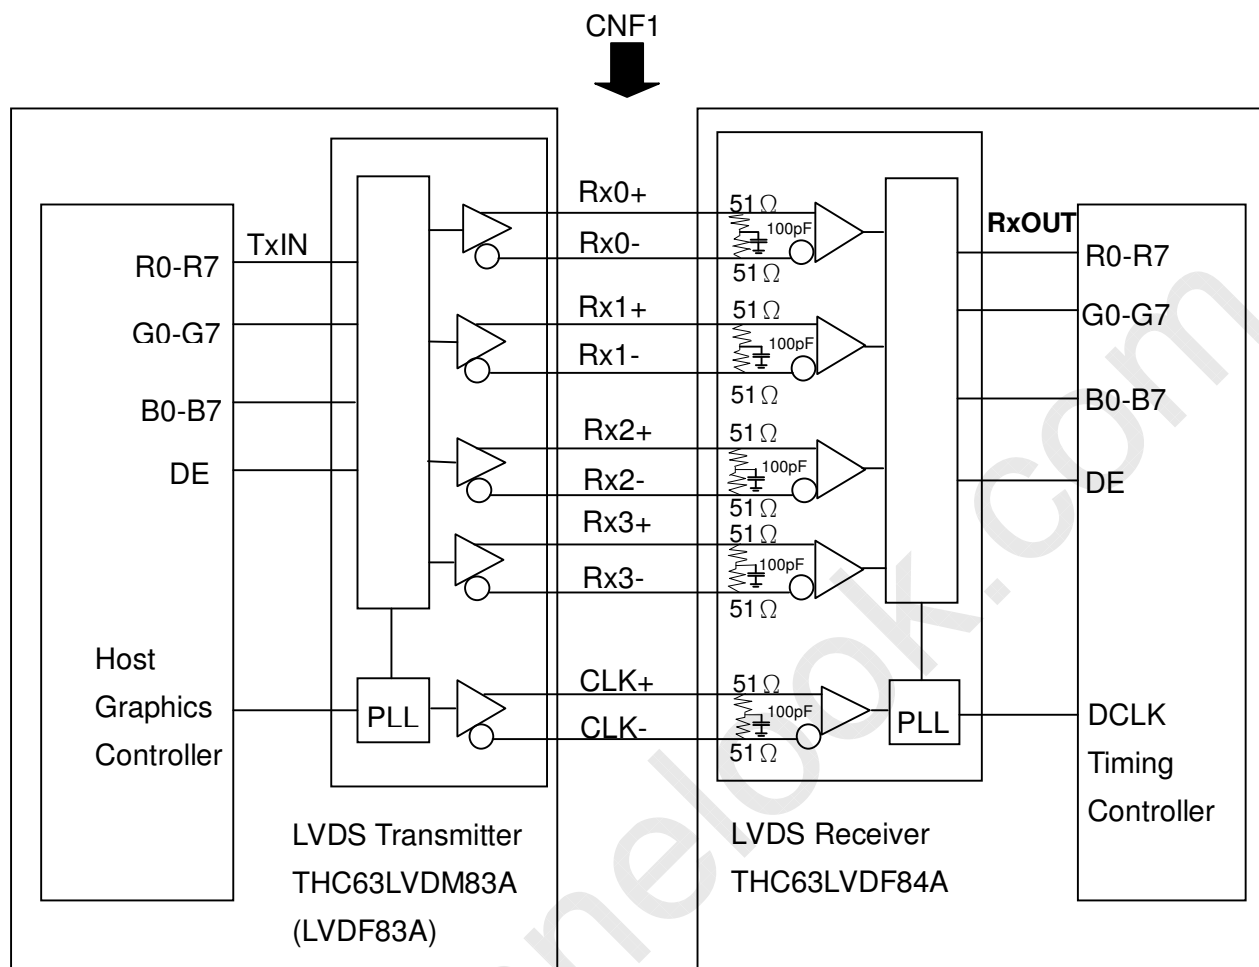
R0~R7 : Pixel R Data

G0~G7 : Pixel G Data

B0~B7 : Pixel B Data

DE   : Data Enable Signal

Note (1) The system must have the transmitter to drive the module.

Note (2) LVDS cable impedance shall be 50 ohms per signal line or about 100 ohms per twist-pair line when it is used differentially.

16

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

5.5 LVDS INTERFACE

SELLVDS = L or Open   (VESA)
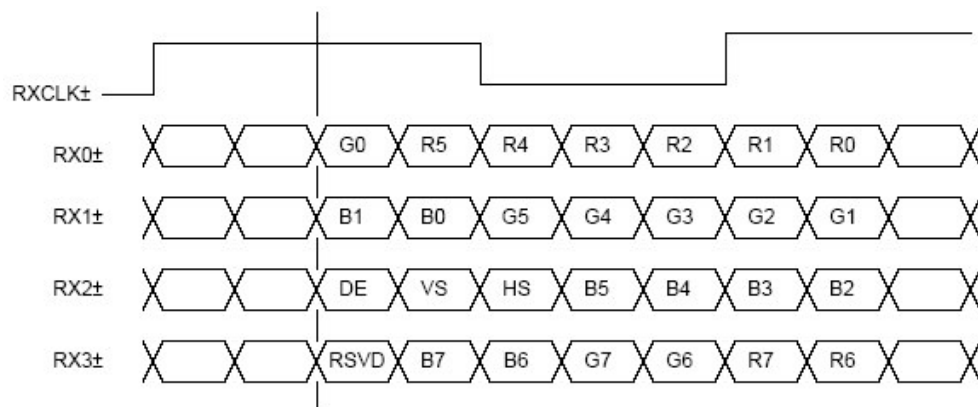
SELLVDS = H (JEIDA)
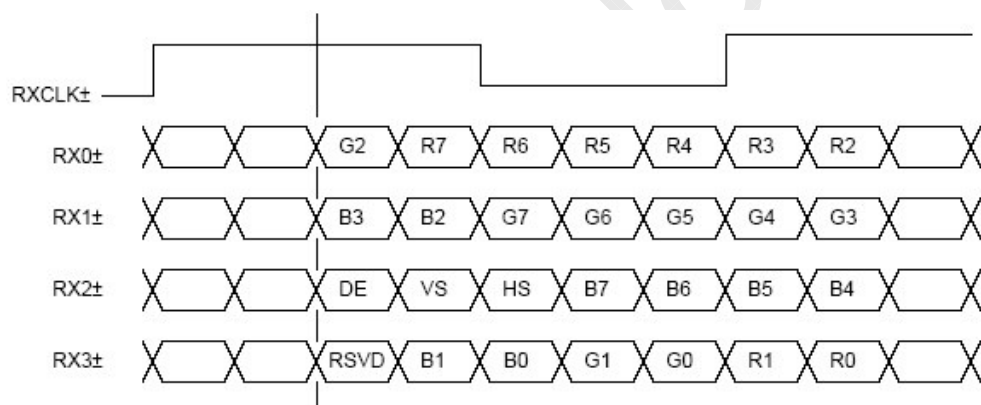
R0~R7: Pixel R Data (7; MSB, 0; LSB)

G0~G7: Pixel G Data (7; MSB, 0; LSB)

B0~B7: Pixel B Data (7; MSB, 0; LSB)

DE : Data enable signal

Notes(1) RSVD(reserved)pins on the transmitter shall be "H" or "L".

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

5.6 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																							
		Red								Green								Blue							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage

18

Version 6.0

Issued Date: 18, Aug 2008
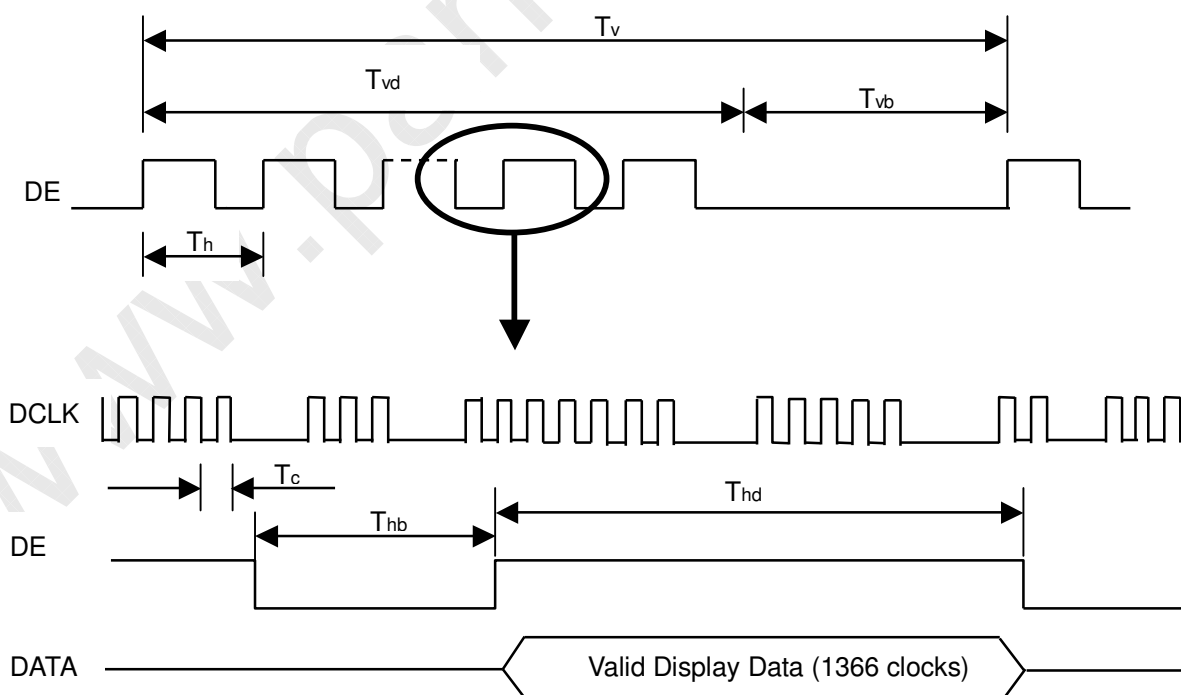Model No.: V260B1 – L11(ECO)

Approval

6. INTERFACE TIMING

6.1 INPUT SIGNAL TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
LVDS Receiver Clock	Frequency	1/Tc	60	76	82	MHz	
	Input cycle to cycle jitter	Trcl	—	—	200	ps	
LVDS Receiver Data	Setup Time	Tlvsu	600	—	—	ps	
	Hold Time	Tlvhd	600	—	—	ps	
Vertical Active Display Term	Frame Rate	Fr_5	47	50	53	Hz	
		Fr_6	57	60	63	Hz	
	Total	Tv	778	806	888	Th	Tv=Tvd+Tvb
	Display	Tvd	768	768	768	Th	-
	Blank	Tvb	10	38	120	Th	-
Horizontal Active Display Term	Total	Th	1442	1560	1936	Tc	Th=Thd+Thb
	Display	Thd	1366	1366	1366	Tc	-
	Blank	Thb	76	194	570	Tc	-

Note (1) Since this module is operated in DE only mode, Hsync and Vsync input signals should be set to low logic level. Otherwise, this module would operate abnormally.

INPUT SIGNAL TIMING DIAGRAM

19

Version 6.0

Approval

LVDS RECEIVER INTERFACE TIMING DIAGRAM

Tc

RXCLK+/-

RXn+/-

Tlvsu

Tlvhd

$$\frac{1T}{14} \quad \frac{3T}{14} \quad \frac{5T}{14} \quad \frac{7T}{14} \quad \frac{9T}{14} \quad \frac{11T}{14} \quad \frac{13T}{14}$$

Version 6.0

Approval
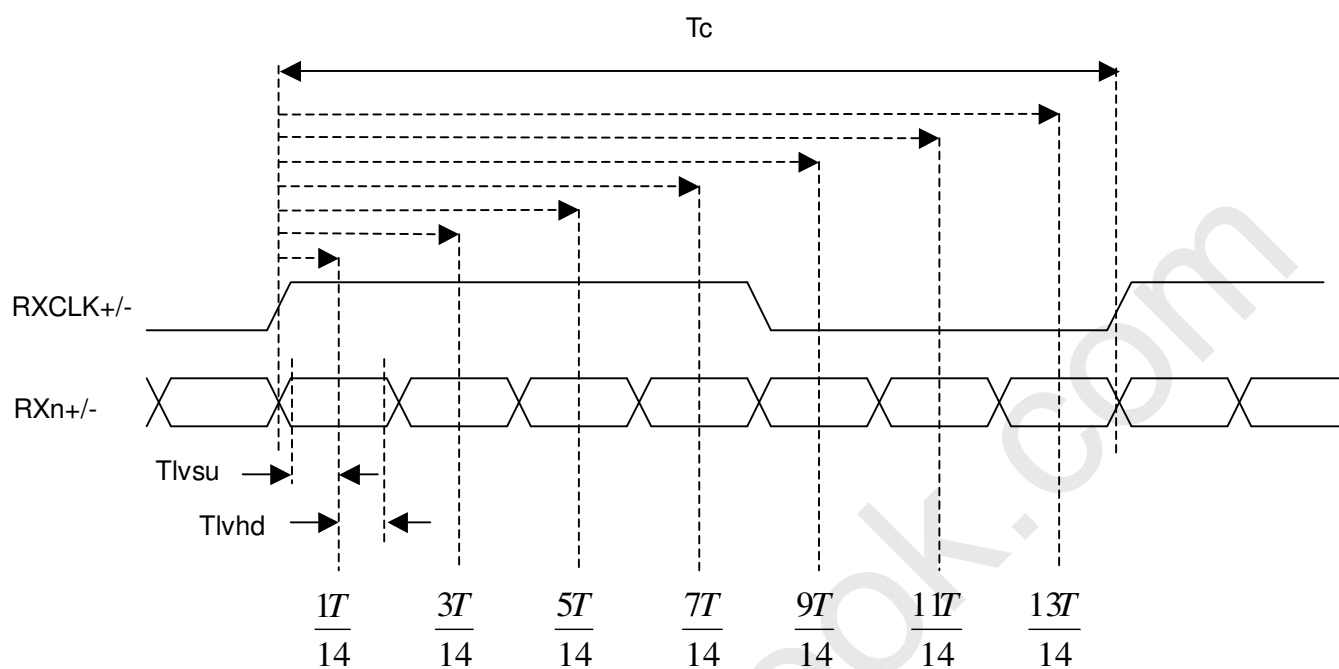
6.2 POWER ON/OFF SEQUENCE

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.
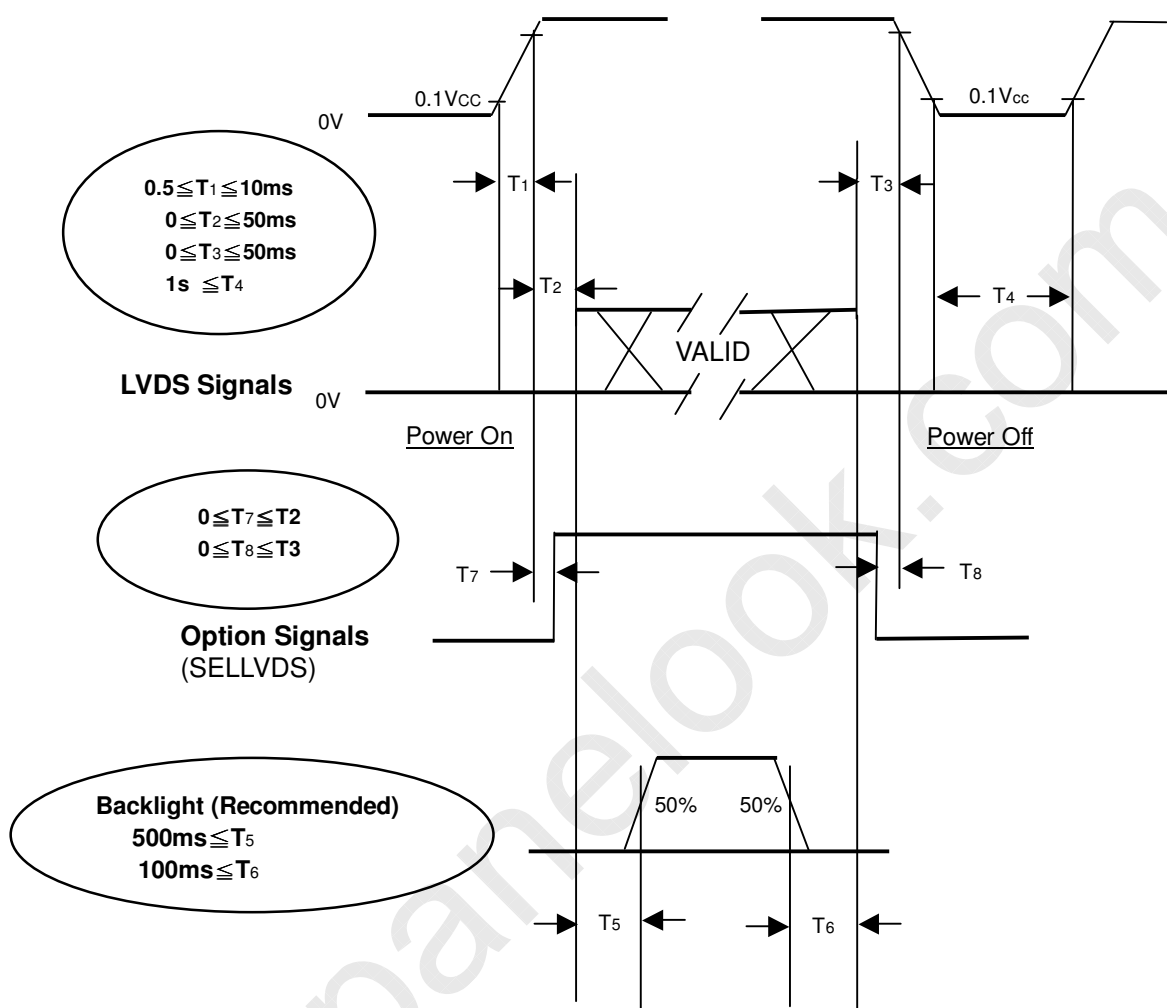
Power ON/OFF Sequence

Note (1) The supply voltage of the external system for the module input should follow the definition of Vcc.

Note (2) Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.

Note (3) In case of Vcc is in off level, please keep the level of input signals on the low or high impedance. If $T2 < 0$, that maybe cause electrical overstress failure.

Note (4) T4 should be measured after the module has been fully discharged between power off and on period.

Note (5) Interface signal shall not be kept at high impedance when the power is on.

21

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

7. OPTICAL CHARACTERISTICS

7.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	^{o}C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V_{CC}	12.0	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
Lamp Current	I_L	6.5 ± 0.5	mA
Oscillating Frequency (Inverter)	F_W	66 ± 3	KHz
Vertical Frame Rate	Fr	60	Hz

7.2 OPTICAL SPECIFICATIONS

The relative measurement methods of optical characteristics are shown in 7.2. The following items should be measured under the test conditions described in 7.1 and stable environment shown in Note (6).

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR		600	800		-	(2)
Response Time		T_R			3	5	ms	(3)
		T_F			5	8		
Center Luminance of White		L_C		350	450			(4)
White Variation		δW				1.3	-	(7)
Cross Talk		CT				4	%	(5)
Color Chromaticity	Red	Rx	$\theta_x=0°, \theta_Y=0°$ Viewing Angle at Normal Direction	Typ. -0.03	0.637	Typ. +0.03	-	(6)
		Ry			0.330		-	
	Green	Gx			0.273		-	
		Gy			0.596		-	
	Blue	Bx			0.151		-	
		By			0.065		-	
	White	Wx			0.280		-	
		Wy			0.285		-	
	Color Gamut	CG		68	72		%	NTSC Ratio
Viewing Angle	Horizontal	θ_x+	CR≥10	70	80		Deg.	(1)
		θ_x-		70	80			
	Vertical	θ_Y+		70	80			
		θ_Y-		60	70			

22

Version 6.0

Approval

Note (1) Definition of Viewing Angle (θx, θy):

Viewing angles are measured by EZ-Contrast 160R (Eldim)
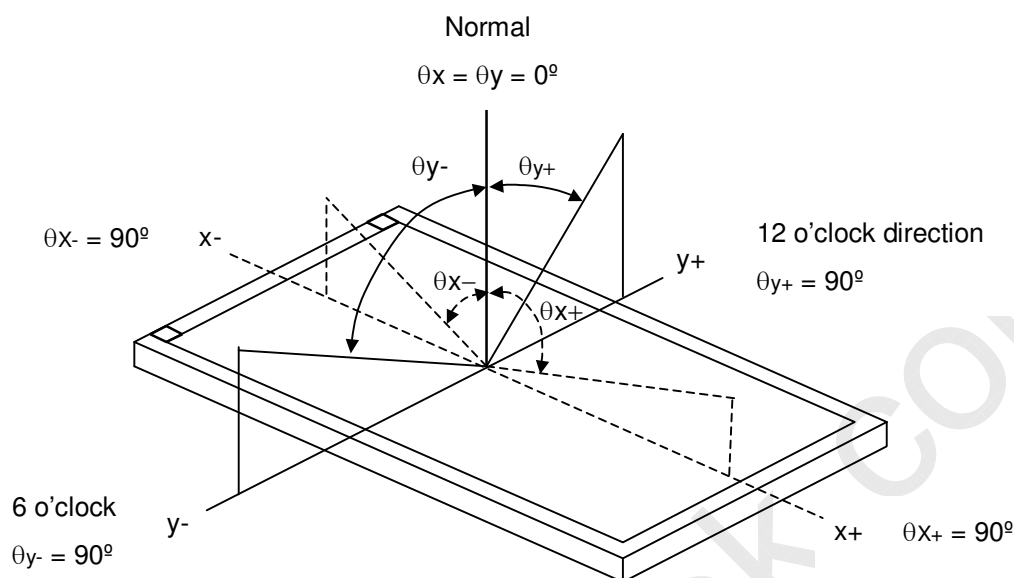
Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L255 / L0

L255: Luminance of gray level 255

L 0: Luminance of gray level 0

CR = CR (5),

CR (X) is corresponding to the Contrast Ratio of the point X at the figure in Note (7).

Note (3) Definition of Response Time (T_R, T_F):

23

Version 6.0

Approval
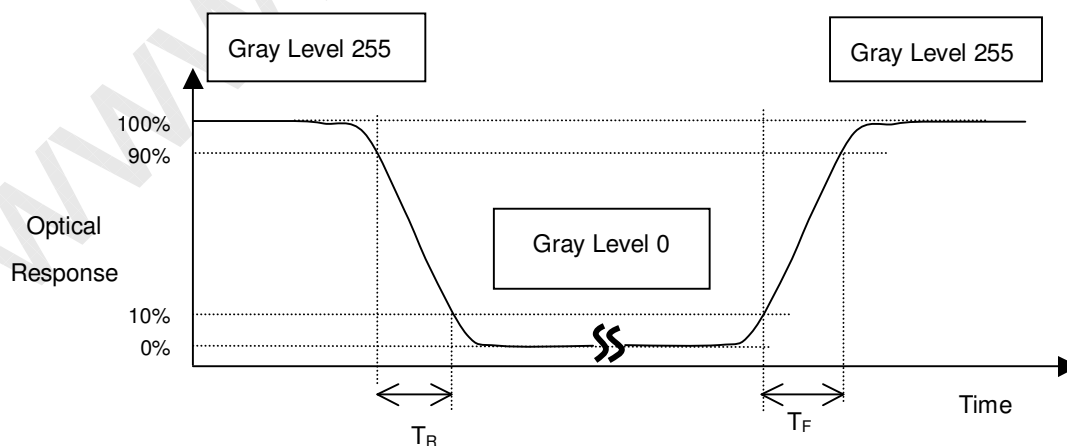
Note (4) Definition of Luminance of White (L_C):

Measure the luminance of gray level 255 at center point and 5 points

$L_C = L$ (5)

L (X) is corresponding to the luminance of the point X at the figure in Note (7).

Note (5) Definition of Cross Talk (CT):

$CT = | Y_B - Y_A | / Y_A \times 100$ (%)

Where:

Y_A = Luminance of measured location without gray level 0 pattern (cd/m^2)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m^2)
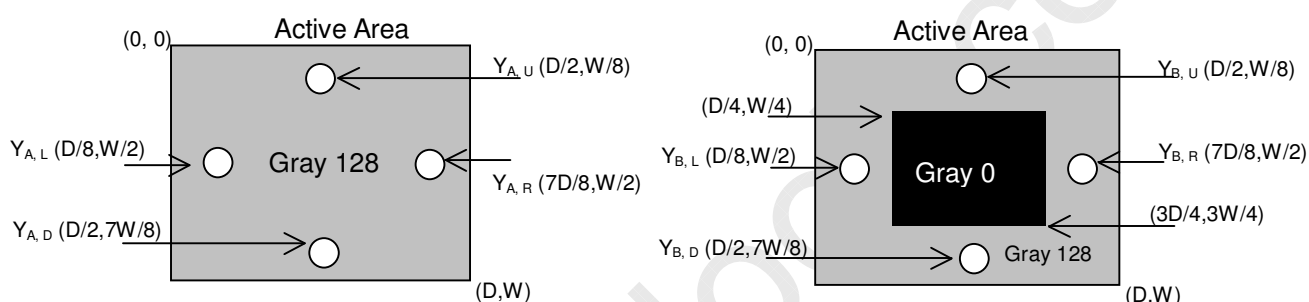
Note (6) Measurement Setup:

The LCD module should be stabilized at given temperature for 1 hour to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 1 hour in a windless room.

24

Version 6.0

Approval
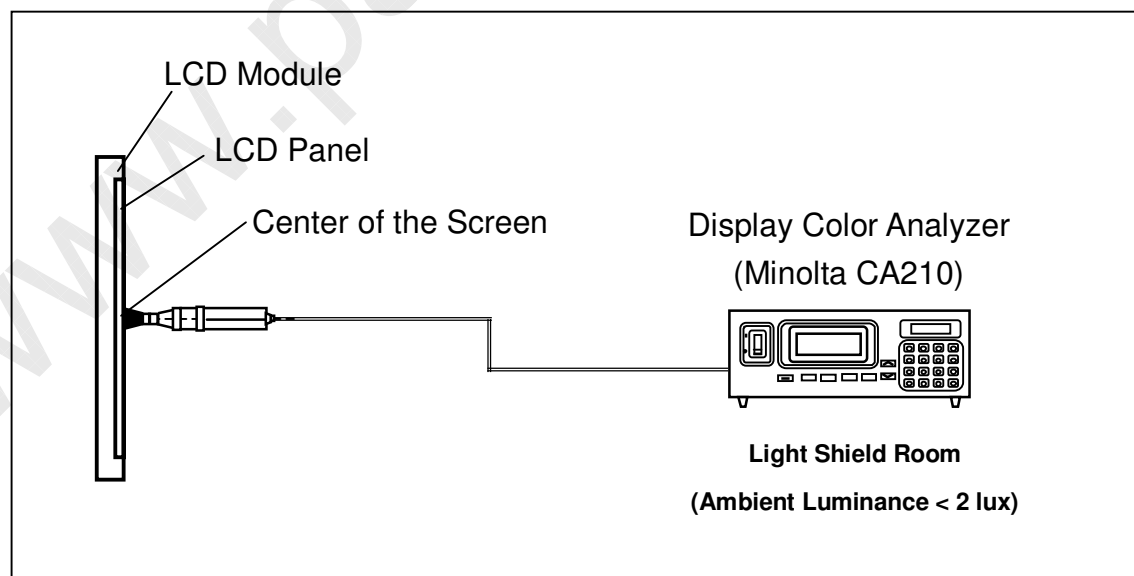
Note (7) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 5 points

δW = Maximum [L (1), L (2), L (3), L (4), L (5)] / Minimum [L (1), L (2), L (3), L (4), L (5)]

Horizontal Line

Active Area

25

Version 6.0

CHI MEI
OPTOELECTRONICS CORP.

Approval
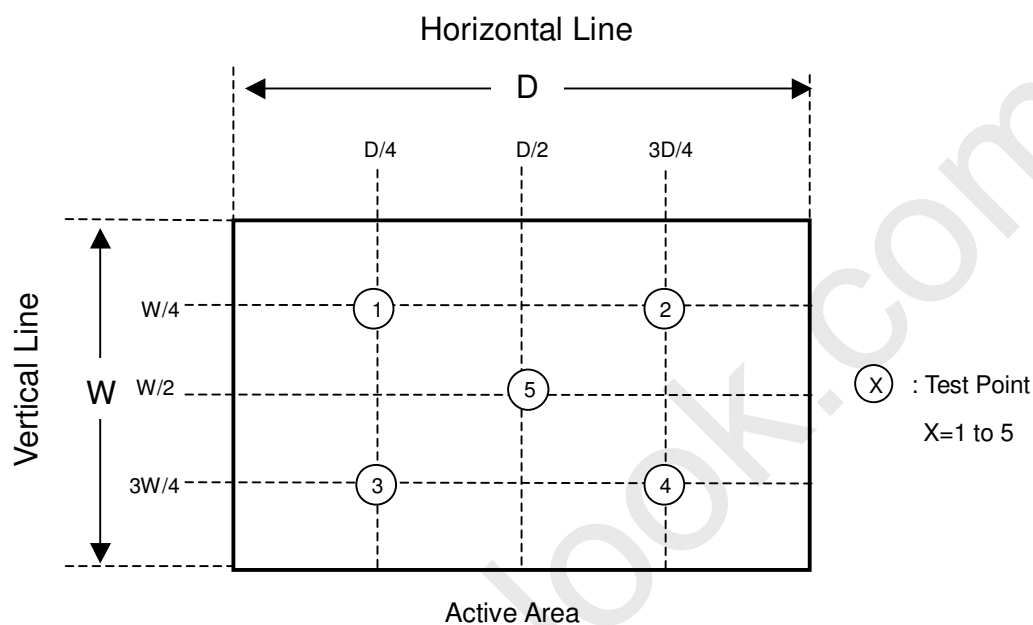
8. DEFINITION OF LABELS

8.1 CMO MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

CHI MEI
OPTOELECTRONICS

V260B1　　　　　-L11 Rev. XX

X X X X X X X Y M D L N N N N

E207943
MADE IN TAIWAN
RoHS

CHI MEI
OPTOELECTRONICS

V260B1　　　　　-L11 Rev. XX

X X X X X X X Y M D L N N N N

E207943
MADE IN CHINA
LEOO(or CAPG or CANO)
RoHS
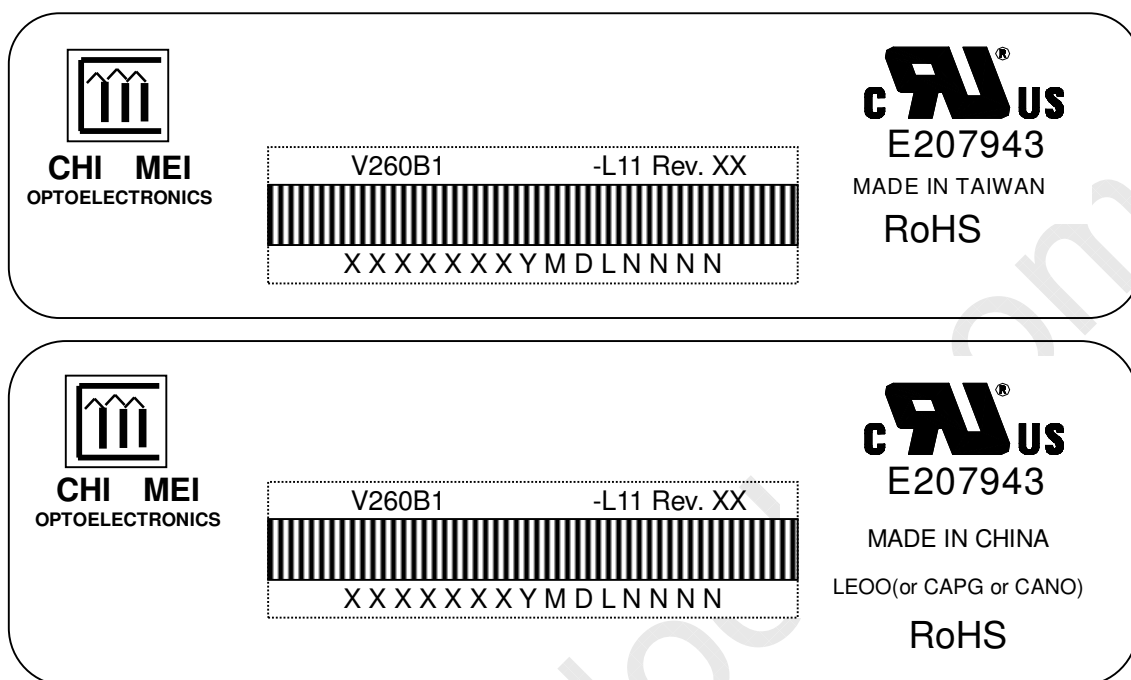
(a) Model Name: V260B1-L11

(b) Revision: Rev. XX, for example: A0, A1… B1, B2… or C1, C2…etc.

(c) Serial ID: X X X X X X X Y M D L N N N N

　　Serial No.

　　Product Line

　　Year, Month, Date

　　CMO Internal Use

　　CMO Internal Use

　　Revision

　　CMO Internal Use
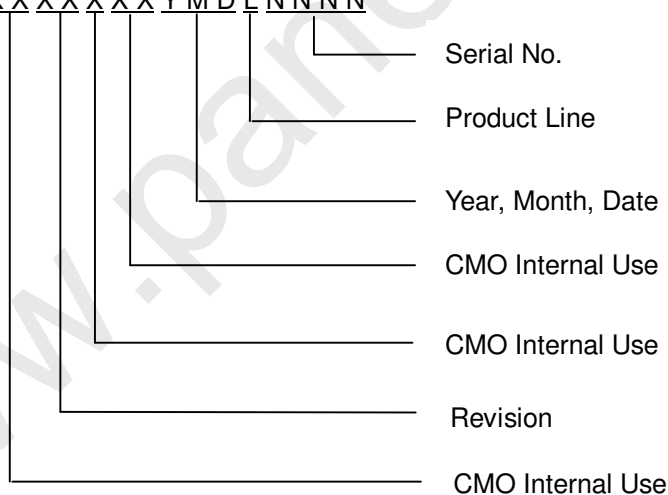
Serial ID includes the information as below:

(a) Manufactured Date: Year: 1~9, for 2001~2009

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I ,O, and U.

(b) Revision Code: Cover all the change

(c) Serial No.: Manufacturing sequence of product

(d) Product Line: 1 -> Line1, 2 -> Line 2, …etc.

26

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

9. PACKAGING

9.1 PACKING SPECIFICATIONS

(1) 6 LCD TV Modules / Carton

(2) Carton Dimensions : 713(L) X 429 (W) X 453 (H)

(3) Weight : Approximately 29 Kg (6 Modules Per Carton)

9.2 PACKING METHOD

Figures 9-1 and 9-2 are the packing method
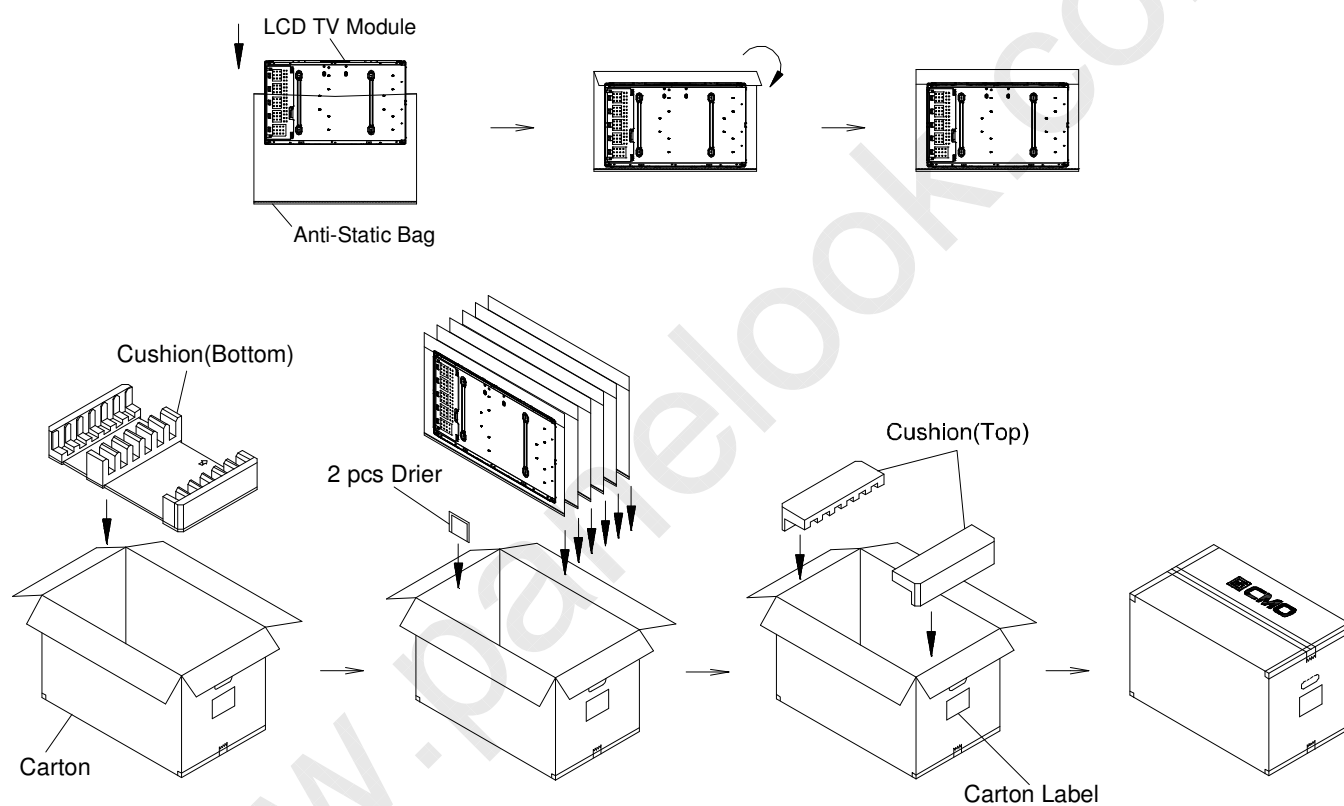
Figure.9-1 packing method

27

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

Sea / Land Transportation (40ft HQ Container)
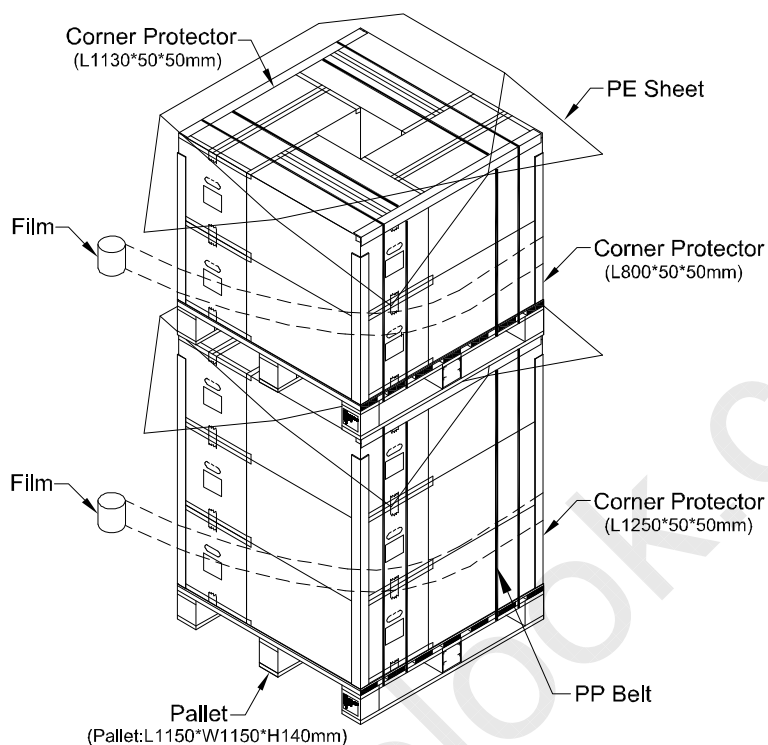
Sea / Land Transportation (40ft Container)

28

Version 6.0

Approval
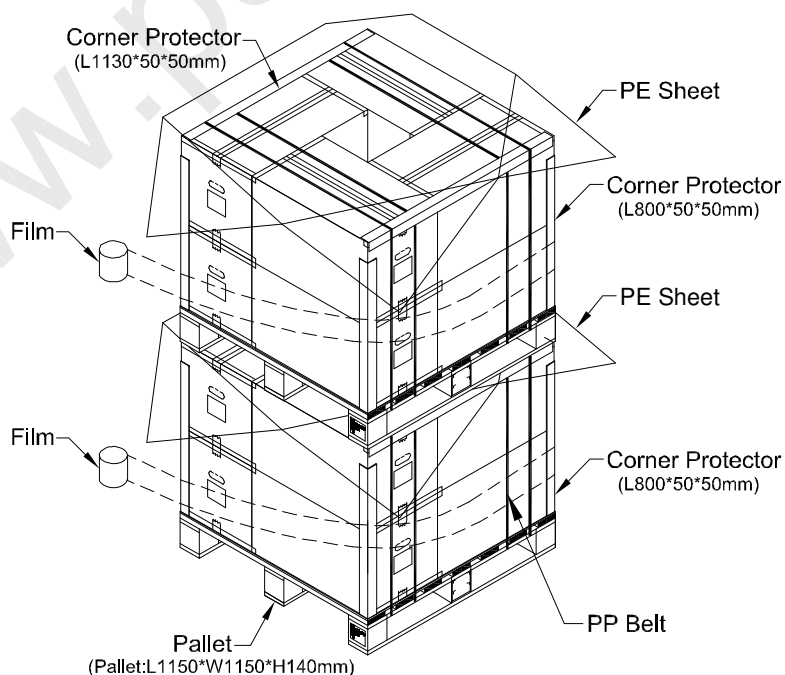
Air Transportation
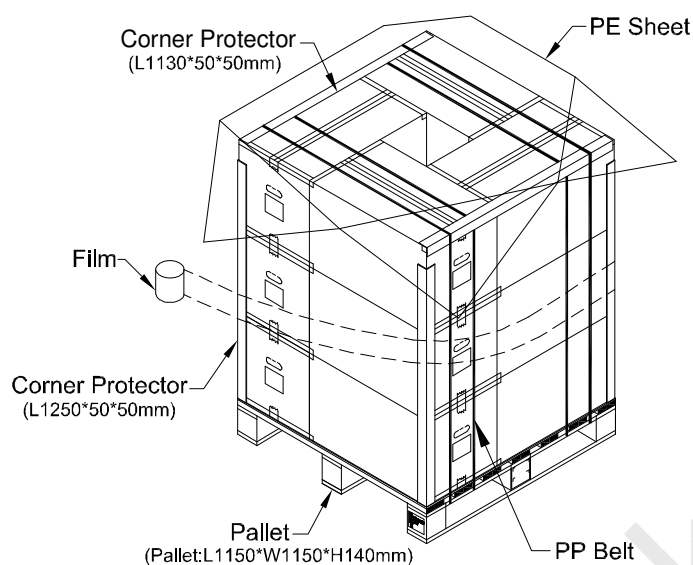
Figure. 9-2 packing method

29

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

10. PRECAUTIONS

10.1 ASSEMBLY AND HANDLING PRECAUTIONS

(1) Do not apply rough force such as bending or twisting to the module during assembly.

(2) It is recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.

(3) Do not apply pressure or impulse to the module to prevent the damage of LCD panel and backlight.

(4) Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.

(5) Do not plug in or pull out the I/F connector while the module is in operation.

(6) Do not disassemble the module.

(7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.

(8) Moisture can easily penetrate into LCD module and may cause the damage during operation.

(9) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD modules in the specified storage conditions.

(10) When ambient temperature is lower than 10ºC, the display quality might be reduced. For example, the response time will become slow, and the starting voltage of CCFL will be higher than that of room temperature.

10.2 SAFETY PRECAUTIONS

(1) The startup voltage of a backlight is over 1000 Volts. It may cause an electrical shock while assembling with the inverter. Do not disassemble the module or insert anything into the backlight unit.

(2) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.

(3) After the module's end of life, it is not harmful in case of normal operation and storage.

10.3 STORAGE PRECAUTIONS

When storing modules as spares for a long time, the following precaution is necessary.

(1) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35℃ at normal humidity without condensation.

(2) The module shall be stored in dark place. Do not store the TFT-LCD module in direct sunlight or fluorescent light.
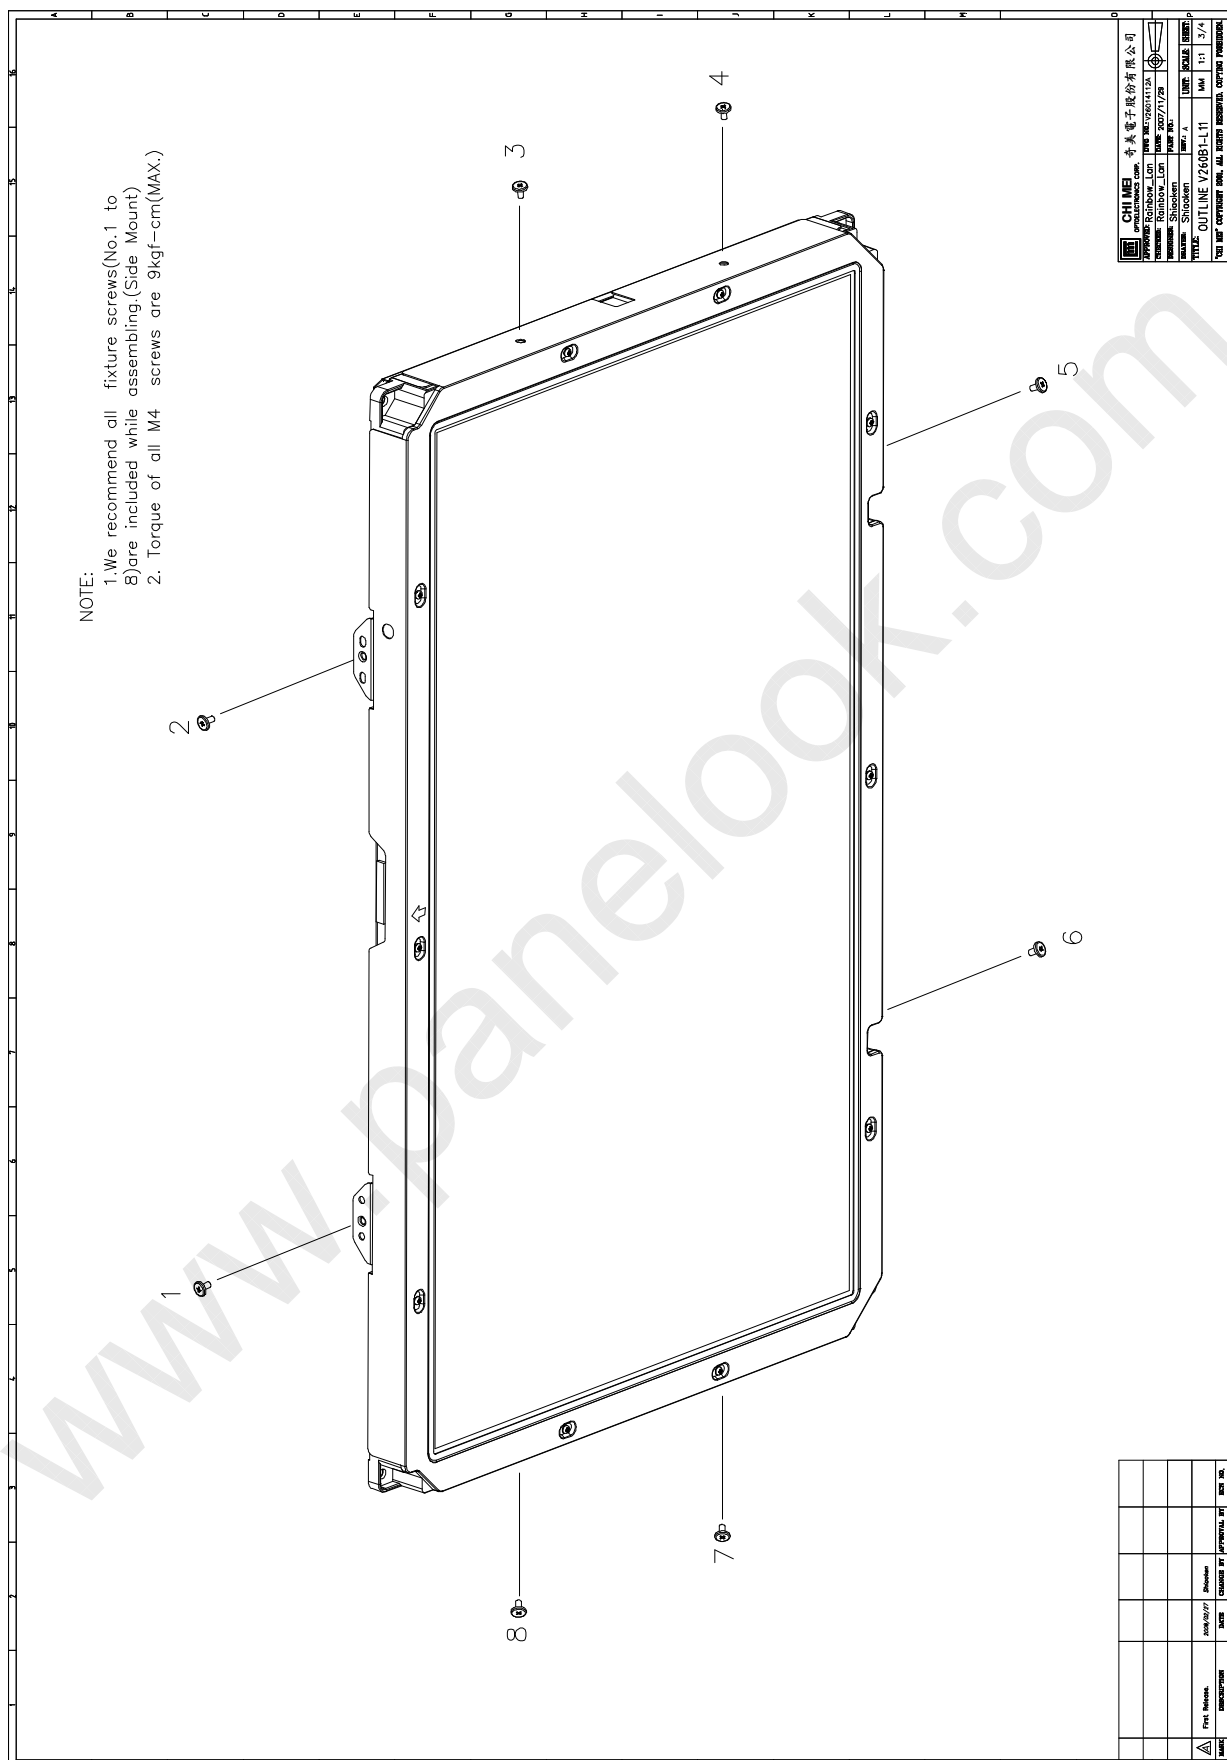
Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

11. REGULATORY STANDARDS

11.1 SAFETY

Regulatory	Item	Standard
Information Technology equipment	UL	UL 60950-1: 2003
	cUL	CAN/CSA C22.2 No.60950-1-03
	CB	IEC 60950-1:2001
Audio/Video Apparatus	UL	UL 60065: 2003
	cUL	CAN/CSA C22.2 No.60065-03
	CB	IEC 60065:2001
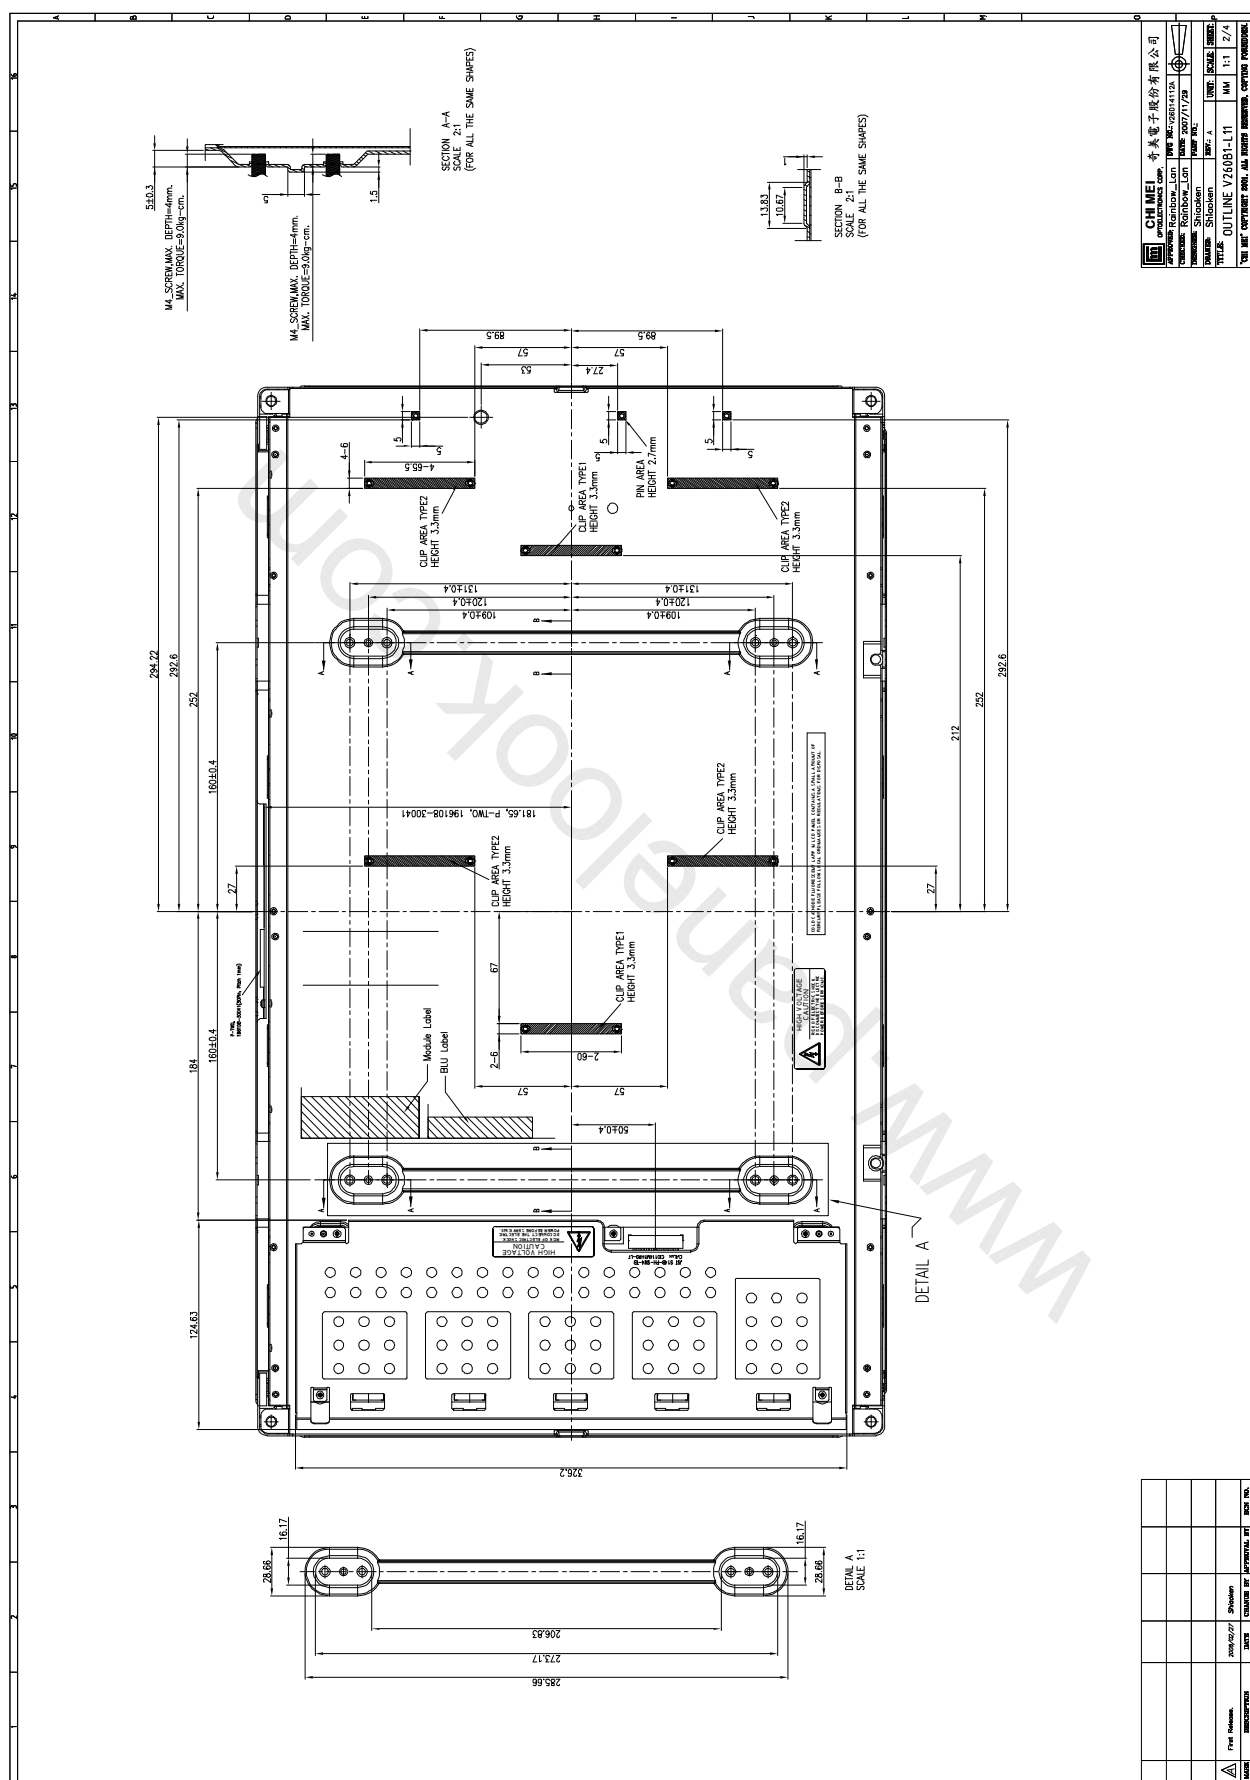
Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

12. MECHANICAL CHARACTERISTICS

32

Version 6.0

33

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

NOTE:
1.We recommend all fixture screws(No.1 to 8)are included while assembling.(Side Mount)
2. Torque of all M4 screws are 9kgf-cm(MAX.)

34

Version 6.0

Issued Date: 18, Aug 2008
Model No.: V260B1 – L11(ECO)

Approval

NOTE:
1.We recommend all fixture screws(No.9 To 16)are included while assembling.(Back Mount)
2. Torque of all M4 screws are 9kgf-cm(MAX.)

Version 6.0